



Type 1206 HV 貼片保險絲 Fast Acting Chipfuse




Dimensions(mm)尺寸

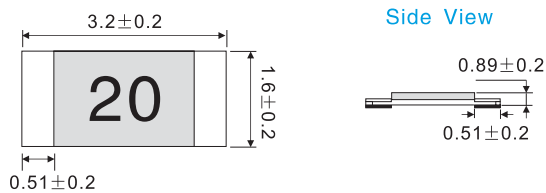

Recommended Pad Layout(mm)



Time Current Characteristic Curve/電流-時間曲綫

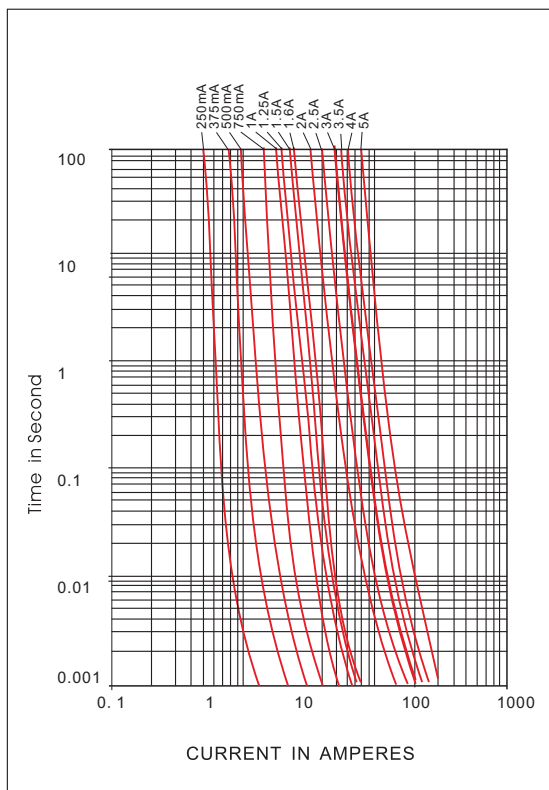

Electrical Specifications 電氣特性

| Catalog Number 料號 | Ampere Rated In 額定電流 | Marking 標記 | Voltage Rating (VDC) 額定電壓 | Normal Resistance Cold(Ohm) 標準冷阻值 | Normal Melting I ² T(A ² sec) 標準熔斷值 |
|----------------------|-------------------------|---------------|------------------------------|--------------------------------------|--|
| 1206HV250mA | 250mA | .25 | 125V | 3.608 | 0.0004 |
| 1206HV375mA | 375mA | E | 125V | 1.882 | 0.0008 |
| 1206HV500mA | 500mA | 0.5 | 125V | 1.028 | 0.0022 |
| 1206HV750mA | 750mA | .75 | 125V | 0.601 | 0.0057 |
| 1206HV1A | 1A | 1 | 125V | 0.230 | 0.030 |
| 1206HV1.25A | 1.25A | ▲ | 125V | 0.165 | 0.040 |
| 1206HV1.5A | 1.5A | 1.5 | 125V | 0.116 | 0.090 |
| 1206HV1.6A | 1.6A | ■ | 125V | 0.080 | 0.100 |
| 1206HV2A | 2A | 2 | 125V | 0.070 | 0.126 |
| 1206HV2.5A | 2.5A | O | 125V | 0.051 | 0.230 |
| 1206HV3A | 3A | P | 125V | 0.032 | 0.250 |
| 1206HV3.5A | 3.5A | R | 72V | 0.025 | 0.230 |
| 1206HV4A | 4A | S | 72V | 0.020 | 0.250 |
| 1206HV5A | 5A | T | 72V | 0.018 | 0.300 |

Electrical Characteristics 熔斷特性

| Electrical Characteristics 熔斷特性 | | |
|---------------------------------|-----------------|-------------------|
| Ampere Rating | % of Amp Rating | Opening Time |
| 250mA-5A | 100% | 4 Hours Minimum |
| 250mA-5A | 250% | 5 Seconds Maximum |

Approvals 認證

| Safety Agency | Amp Range/Volt @ I.R ability |
|---------------|---|
| | 250mA-3A 125V AC/125V DC@50A 3.5A-5A 125VAC/72V DC@50A |

Operation Temperature 工作溫度

-40°C to 125°C

Physical Specification 物理特性

Materials 材料

Ceramic Body/Glass Cover
Terminations: Silver over-plated with nickel and tin
Element: Silver or Silver / palladium

Packaging 包裝

On Tape: 1206HV-3000pcs Per Reel
1206HV-30000 pcs outer box